




HDPE Core Bit (Carbide Teeth)

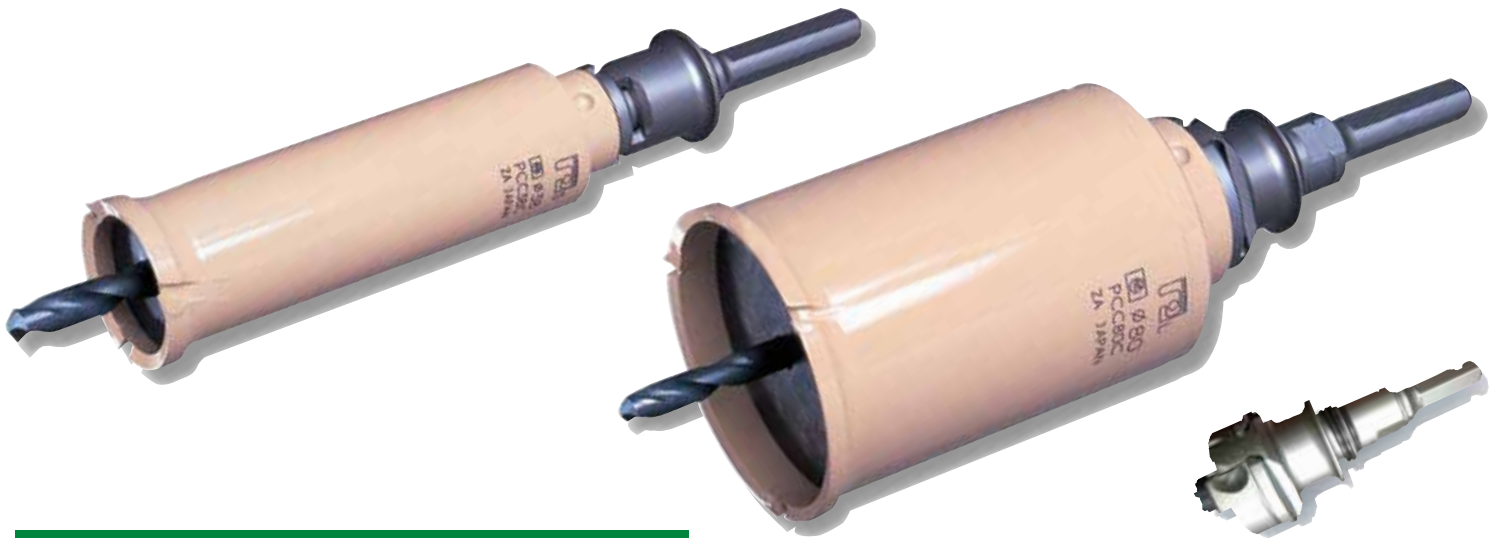

Features

- Carbide tip and hole saw design is for burr-free drilling which will allow for least amount of debris left in the pipe.
- The hole saw fits snugly into the guides on the inside of the branch.
- Center drill bit is not a necessary because of the guides matching the hole saw. This will help installers decrease the possibility of "punching" through the bottom of the pipe during installation.
- Installer can drill up to 7-8 times, before easily removing the hole saw to clear the pipe core removed during drilling.
- The extra length on the shank gives the correct above-trench height for ease of drilling.

Marking blade provides EXCELLENT cutting performance!

Specifications

- Dia : 25/32" (20mm) - 8-1/4" (210mm)
- Drilling depth : 4" (100mm) / 5" (130mm)
- Long shank (8") available for deeper drilling
- Shank dia : Poly-clic shank "S" / "L"
 - S shank : 25/32" (20mm) - 1-3/4" (45mm)
 - L shank : 2" (50mm) - 8-1/4" (210mm)
- CAUTION: Use "Wooding Core Bit" to drill a hole in materials that contain nails.

by  **CMF**TM
GLOBAL



Size Table

Cutter

The actual sizes are in metric.

Diameter (inch)	Diameter (mm)	Cutter length (inch)	Part No.	for Outlet DR 11.0	
25/32	20		AFPCC20C		
7/8	22		AFPCC22C		
1	25		AFPCC25C		
1-3/32	28		AFPCC28C		
1-3/16	30		AFPCC30C		
1-1/4	32		AFPCC32C		
1-3/8	35		AFPCC35C		
1-1/2	38		AFPCC38C	1.5" IPS	
1-9/16	40		AFPCC40C		
1-3/4	45		AFPCC45C	2.0" IPS	
2	50	4	AFPCC50C		
2-1/8	55		AFPCC55C		
2-3/8	60		AFPCC60C		
2-9/16	65		AFPCC65C		
2-3/4	70		AFPCC70C	3.0" IPS	
2-7/8	75		AFPCC75C		
3-1/8	80		AFPCC80C		
3-3/8	85		AFPCC85C		
3-1/2	90		AFPCC90C	4.0" IPS	
3-3/4	95		AFPCC95C		4.0" DIPS
3-7/8	100		AFPCC100C		
4-1/8	105		AFPCC105C		
4-1/4	110		AFPCC110C		
4-1/2	115		AFPCC115C		
4-3/4	120		AFPCC120C		
5-1/8	130		AFPCC13013C	6.0" IPS	6.0" DIPS
5-7/8	150		AFPCC15013C		
6-5/16	160	5	AFPCC16013C		
6-5/8	170		AFPCC17013C	8.0" IPS	8.0" DIPS
8-1/4	210		AFPCC21013C	10.0" IPS	10.0" DIPS

Shank

Poly-clic shank	Part No.	For use with
S Shank	AFPCSKS	25/32" - 1-3/4" (20mm - 45mm)
S Shank SDS	AFPCSKSR	
S Shank 200L(8")	AFPCSKS200	
S Shank SDS 200L(8")	AFPCSKSR200	
L Shank	AFPCSKL	2" - 8-1/4" (50mm - 210mm)
L Shank SDS	AFPCSKLR	
L Shank 200L(8")	AFPCSKL200	
L Shank SDS 200L(8")	AFPCSKLR200	
L Shank with 7/16" Hex	AFPCSKL716HEX	
SDS-max Shank(Rotary mode)	AFPCSKLMAXK	1" - 1-3/4"(25mm - 45mm)
Dust Cap for S Shank	AFPCBCS	2" - 8-1/4"(50mm - 210mm)
Dust Cap for L Shank	AFPCBCL	

Center Drill

Description	Part-No.	For use with
HSS Center Drill	AFPCCDCS	up to 1-3/4" (45m)
	AFPCCCDL	from 2"(50mm) to 4-3/4"(120mm)
	AFPCWCD225	from 5-1/8"(130mm) and up

Recommended Drill Speed/Wattage

Diameter inch (mm)	rpm	W
25/32 - 1-3/4 (20-45)	800 - 1500	550W or larger
2 - 3-1/8 (50-80)	700 - 1100	650W or larger
3-3/8 - 6-5/16 (85-160)	500 - 1100	750W or larger

AquaFuse™ by CMF GLOBAL

2445 Fenton Street ■ Chula Vista, CA 91914-3517 ■ Telephone: 619-869-8919 ■ Fax: 619-330-4532

1-877-586-6060 24 Hour Technical Hotline ■ 25 YEAR LIMITED SYSTEM WARRANTY

PRODUCT INSTALLATION TRAINING AVAILABLE